


THIS IS IT

The stereo sale everybody has been waiting for. We're not going out of business, we're not just lowering the prices on a few models, and we will not be beat on price anywhere in the state of Texas... Now all you have to do is find us. (We didn't say would be easy.) Here's some examples of the great deals for you:

RECEIVERS & TAPE DECKS:

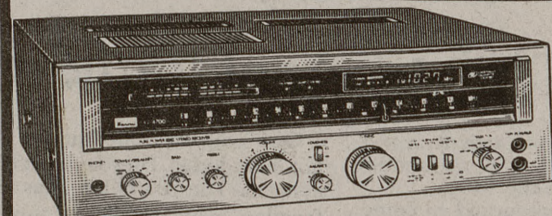

Sansui

G-4700

Pure Power DC Stereo Receiver with Digitally Quartz-Locked Tuning System


Reg. 375⁰⁰

SPECIFICATIONS

Power Output: 50 watts per channel, min. RMS, both channels driven, into 8 ohm load from 20 to 20,000 Hz with no more than 0.05% total harmonic distortion FM Sensitivity (IHF): 10.8dBf (1.9µV) Controls: BASS, TREBLE, LOUDNESS Dimensions: 433 mm (17-1/16" W) x 155 mm (6-1/8" H) x 355 mm (14" D) Weight: 8.6kg (19 lbs.) Finish: Simulated rosewood grain

SALE
299⁹⁵

PIONEER SX-780 Stereo Receiver

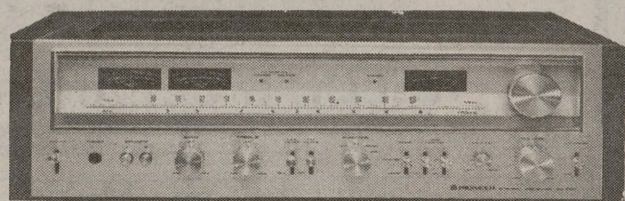


Pioneer SX-780 Stereo Receiver with Hybrid DC Power Amplifier Circuitry provides the latest improvements in FM/AM tuner performance.

Continuous power output of 45 watts* per channel, min. at 8 ohms from 20 hertz to 20,000 hertz with no more than 0.05% total harmonic distortion, or 45 watts* per channel at 4 ohms from 20 hertz to 20,000 hertz with no more than 0.08% total harmonic distortion.

Reg. 375⁰⁰ Only **229⁹⁵**


PIONEER CT-F500

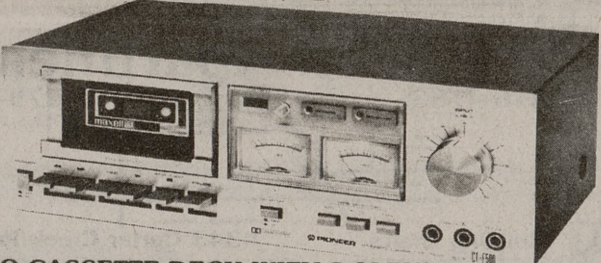

STEREO CASSETTE DECK WITH DOLBY* Motor: Electronically-controlled DC motor Wow & Flutter: 0.05% (WRMS) S/N Ratio: 64dB (Dolby on) Frequency Response: 30-16,000Hz (chrome tape) Dimensions: 14 15/16" (W) x 5 1/2" (H) x 10 1/4" (D) Weight: 11 lb.

Only **129⁹⁵**


PIONEER CT-F1250

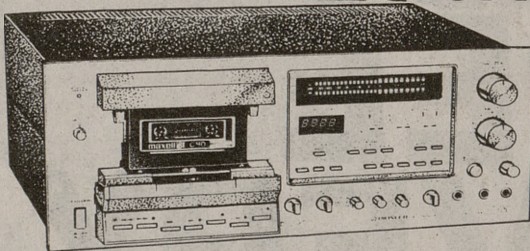

2-MOTOR 3-HEAD METAL TAPE CAPABLE STEREO CASSETTE DECK WITH DOLBY* LED-AIDED EQL* TUNING SYSTEM Motors: Quartz-PLL direct drive motor for capstan drive, DC high torque motor for fast forward and rewind Wow & Flutter: 0.03% (WRMS) S/N Ratio: 69dB (Dolby on) Frequency Response: 20-20,000Hz (metal tape) 20-19,000Hz (chrome tape) Dimensions: 16 1/2" (W) x 7 1/2" (H) x 14 1/2" (D) Weight: 24 lb.


Reg. 695⁰⁰ SALE **499⁹⁵**

BIC T-1 Cassette Deck

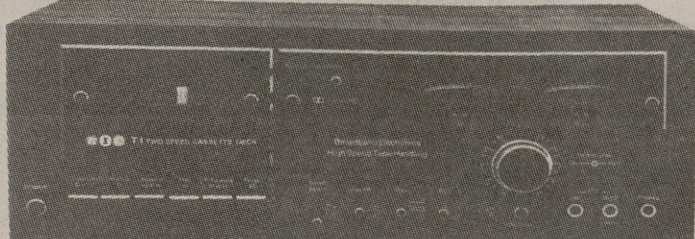

- Two speeds (1 7/8 ips, 3 3/4 ips)
- Boardband Electronics
- Now at an incredible price.

Reg 300⁰⁰ SALE **199⁹⁵**

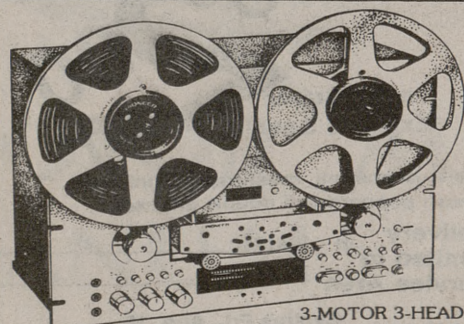

PIONEER RT-901

Reg. 850⁰⁰

SALE **599⁰⁰**

3-MOTOR 3-HEAD STEREO TAPE DECK Motors: FG Servo DC motor x1 (dual capstan drive), 6-pole inner-rotor special induction motor x2 (reel drive) Tape Speeds: 7 1/2 ips, 3 3/4 ips ± 0.6% Wow & Flutter: 0.04% (WRMS, at 7 1/2 ips) S/N Ratio: 60dB (7 1/2 ips) Frequency Response: 20-30,000Hz (7 1/2 ips) Dimensions: 18 1/2" (W) x 13 3/4" (H) x 12 1/2" (D) Weight: 46 lb. 5 oz.

SPEAKERS:

PIONEER HPM 100

4-WAY 4-SPEAKER SYSTEM

Enclosure: Bass-reflex type Speakers: 12-inch carbon fiber blended cone woofer, 4-inch cone midrange, 1 1/4-inch cone tweeter, High polymer film supertweeter Frequency Range: 30-25,000Hz Sensitivity: 92.5dB/W (1m) Nominal Input Power: 100W Amplifier Power Range: 50-270W (recommended) Dimensions: 15 1/2" (W) x 26 3/8" (H) x 15 1/2" (D) Weight: 58 lb. 14 oz.



Reg. 350⁰⁰

SALE **199⁹⁵**

PIONEER PROJECT 80



2-WAY 2-SPEAKER SYSTEM

Enclosure: Bass-reflex type Speakers: 8-inch cone woofer, 1 1/8-inch cone tweeter Frequency Range: 35 - 20,000Hz Sensitivity: 92dB/W (1m) Maximum Input Power: 20W Dimensions: 10 1/2" (W) x 18 1/2" (H) x 11 1/4" (D) Weight: 12 lb. 8 oz.

1/2 Price

50⁰⁰ each

Ultralinear HPS 112



System Components: 12" (30.5cm) high compliance-low frequency driver, with 6 1/4 lb. magnetic drive motor structure and 2" diameter, four-layer voice coil.

Crossover Frequencies: 1800 Hz and 3800 Hz

Nominal Impedance: 8 ohms

Frequency Response: 28 Hz to 20,000 Hz

Power Capacity: Minimum 7 Watts (RMS) Maximum 100 Watts (RMS), circuit breaker protected.

Cabinet: Simulated walnut grained finish with protective Melamine coating.

Dimensions: 24 1/4" H x 14 1/2" W x 12 1/2" D (62cm H x 37cm W x 31.75cm D)

Shipping Weight: 42 lbs. (19.05kg) each packed 1 per carton.


Reg. 250⁰⁰ SALE **125⁰⁰**

CAR STEREOS

JENSEN Model 405

10 watt AM/FM stereo/cassette with Auto Reverse

JENSEN SOUND LABORATORIES
Specifications
Frequency Response: 30 Hz-15 kHz (± 3 dB)
Continuous Average Power Output: Per Channel: 5 watts
Total System: 10 watts
Total Harmonic Distortion: 1% @ 8 watts, 1kHz Useable FM Sensitivity (Mono): 1.5 µV/75Ω 50 dB Quieting Sensitivity (Mono): 2.5 µV/75Ω (19.2 dB) (14.8 dB)
FM Selectivity: 60 dB
FM Stereo Separation (at 1 kHz): 30 dB Capture Ratio: 1.5 dB
Signal-to-Noise, (FM Tuner): 68 dB
Wow and Flutter: 0.15%
Tone Controls:
Bass ± 10 dB @ 100 Hz
Treble ± 10 dB @ 10 kHz
Loudness Compensation: +6 dB @ 100 Hz
Stock No.: J1166

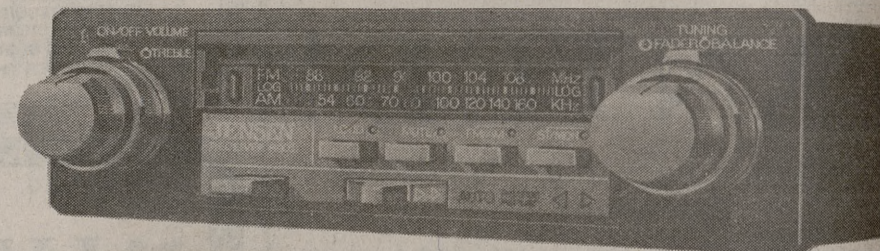

ONLY **229⁹⁵**

KP5500 AM/FM In-Dash Cassette Supertuner with TS162DX Speakers

The whole system: Reg 280⁰⁰ **189⁹⁵**



PIONEER


Everything in the store is on sale!

All items limited to stock on hand.

THIS IS IT... FROM THE GREATEST STORE IN THE WORLD.

GUSTOM SOUNDS

3806 Old College 846-5803

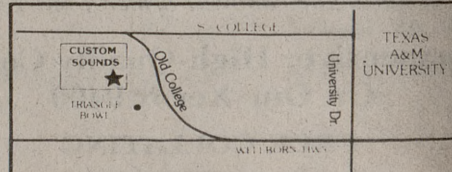

OPEN Mon-Sat 10-6 p.m.